




# Asus Eee PC 1008ha Graphics Card Replacement

This is a guide to replace the graphics card in your device.

Written By: Alex Powers

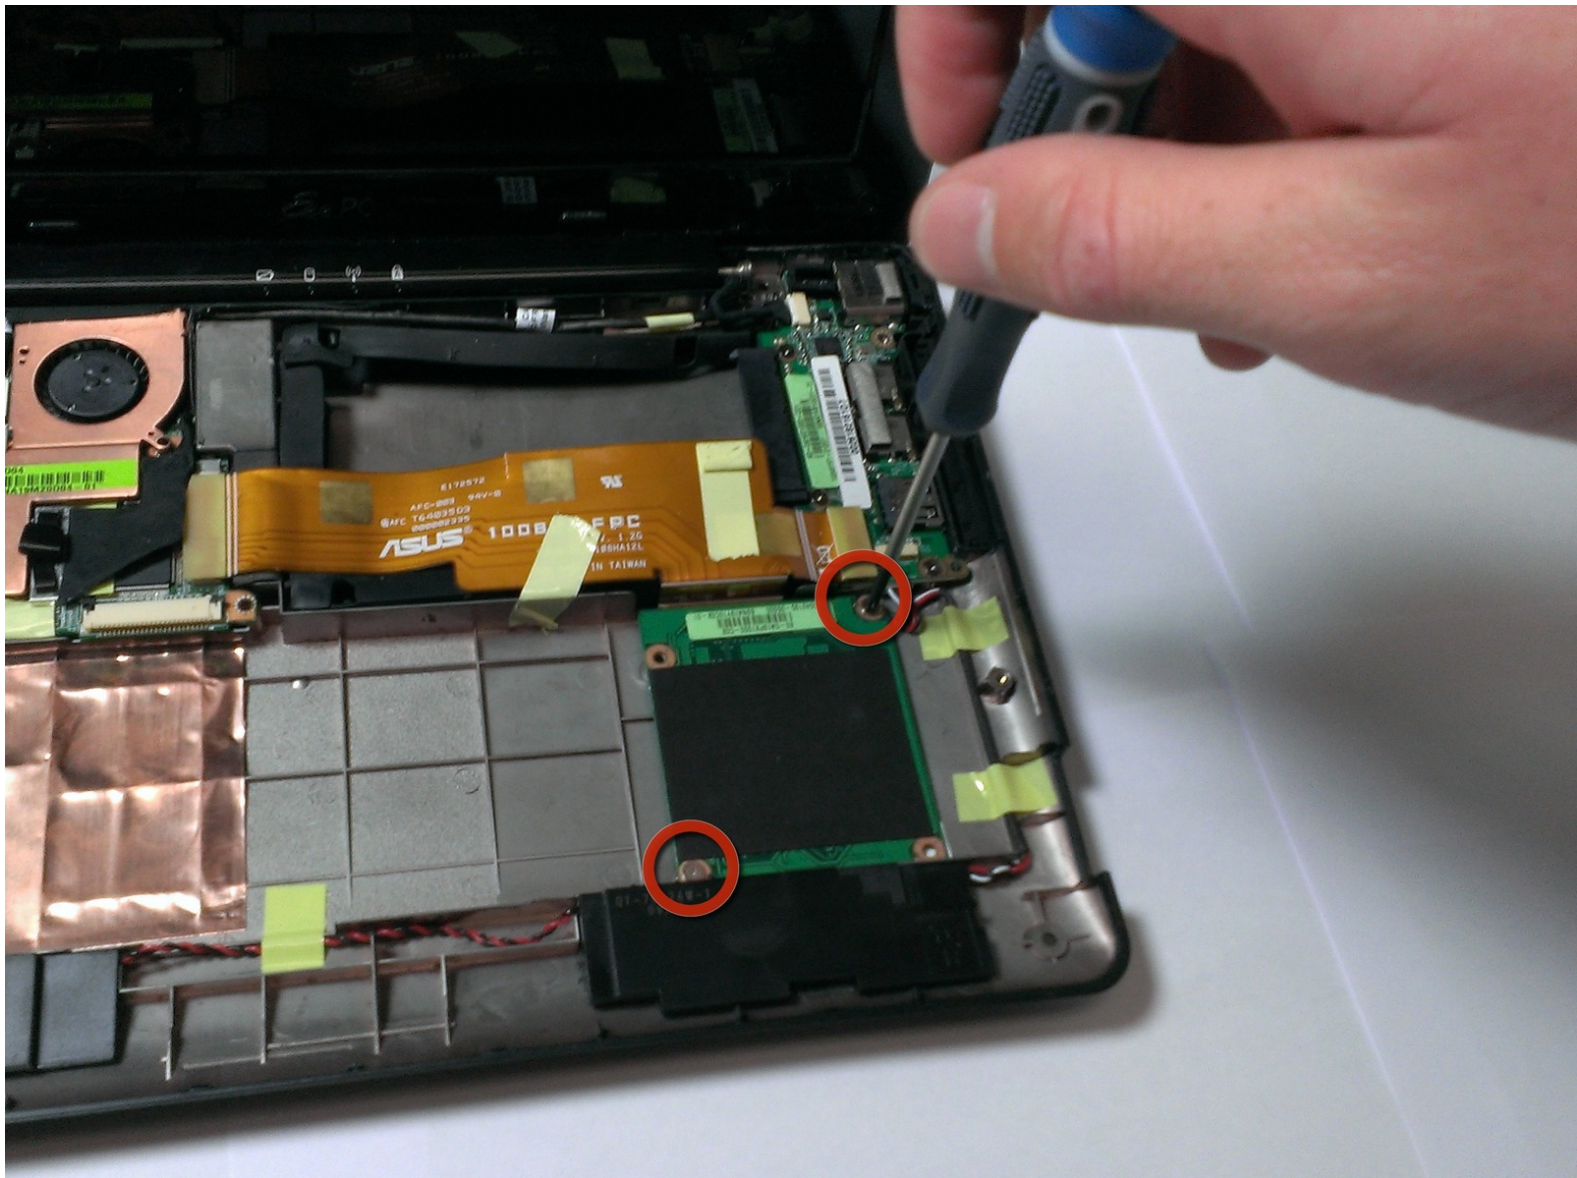

## INTRODUCTION

You will be the remove of the battery and continue to cautiously take the graphics card off of the laptop. This installation would be necessary if a user has a fried, defected, or inoperative in general.



### TOOLS:

- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
- [Phillips #00 Screwdriver](#) (1)



### PARTS:


- [Replacement Graphics Card](#) (1)

## Step 1 — Battery



- Using the Plastic Opening Tool, carefully pry the top panel from the base.


## Step 2

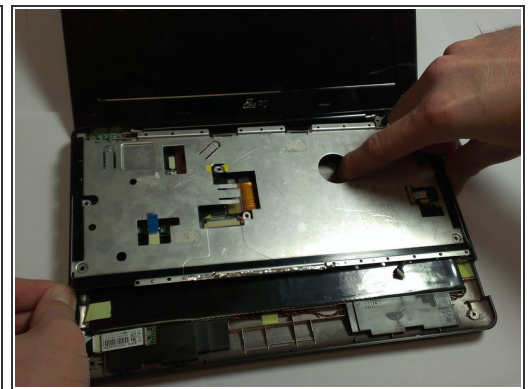

- Lift the side of the keyboard gently and disconnect the attached ribbon located underneath the keyboard.
- Place your index finger in the hole on the right side of the keyboard tray and lift the tray gently.




## Step 3

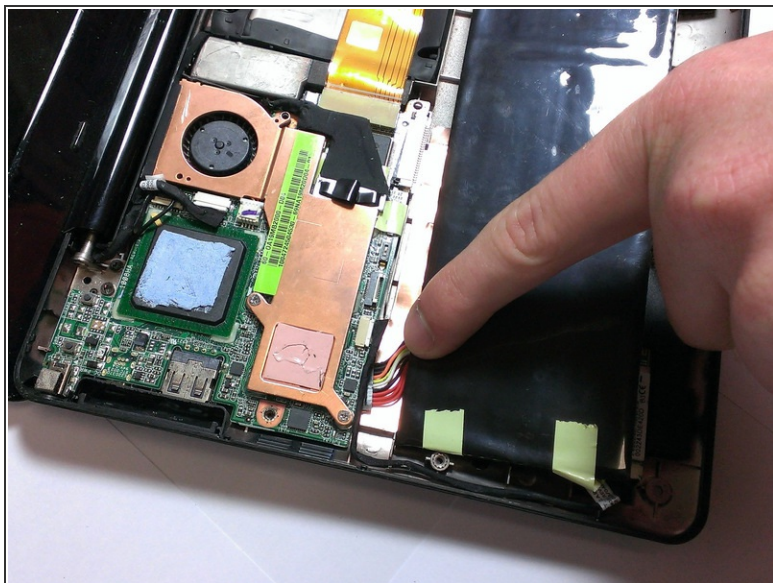


- Use your fingers to lift the battery and gently disconnect the wires from the base.

## Step 4 — Graphics Card

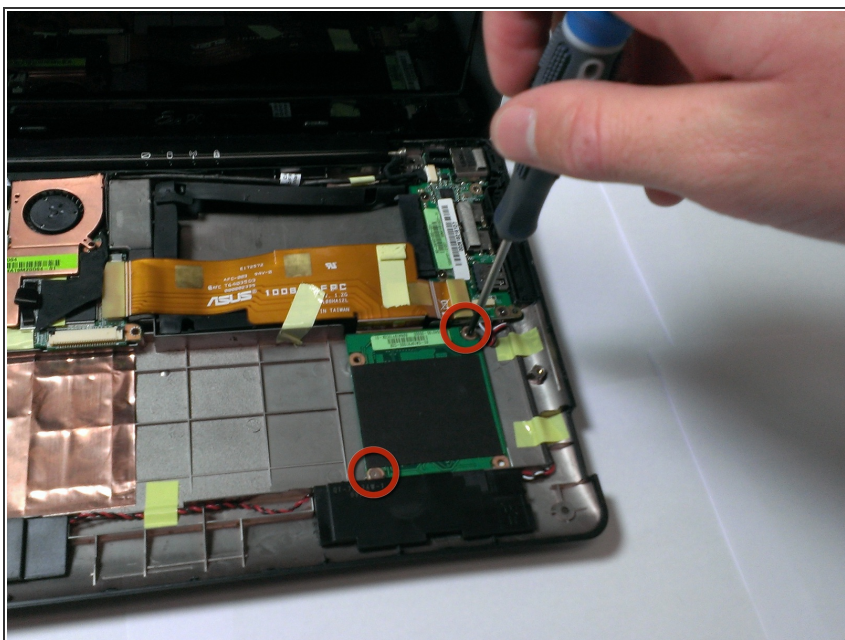


- Remove the 2mm screws from the graphics card (circled in red).

## Step 5

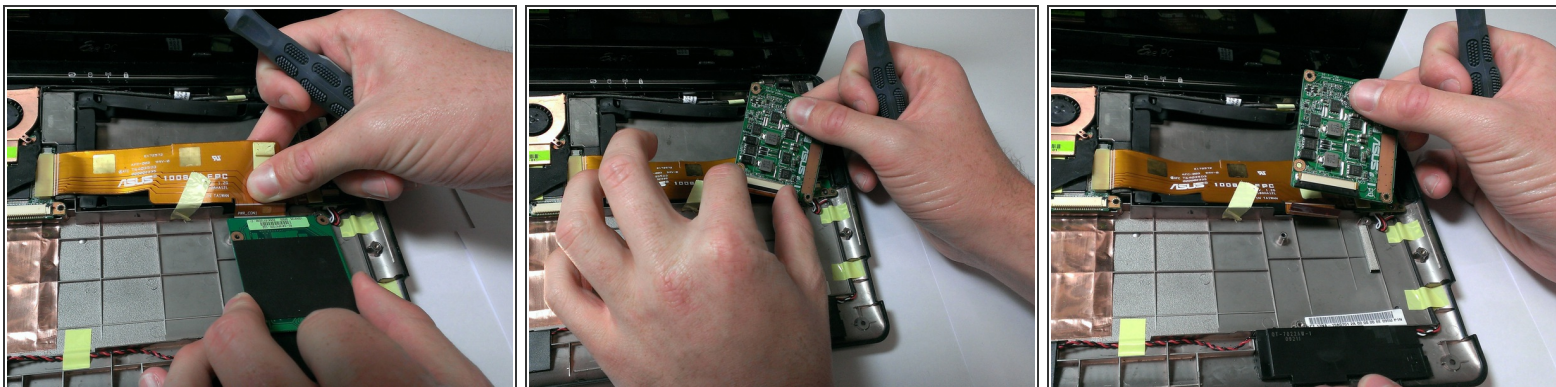

- Flip over the graphics card.
- Pull the black plastic locking mechanism towards the golden ribbon to unlock.
- Pull out the ribbon.

## Step 6

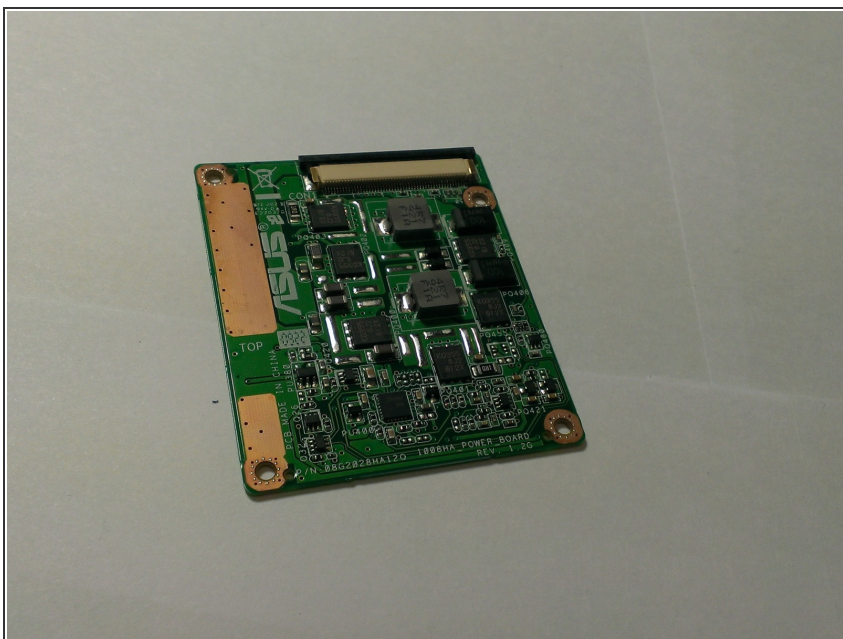

- Replace graphics card!

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 05:59:36 AM.